


INDUSTRIAL OILS



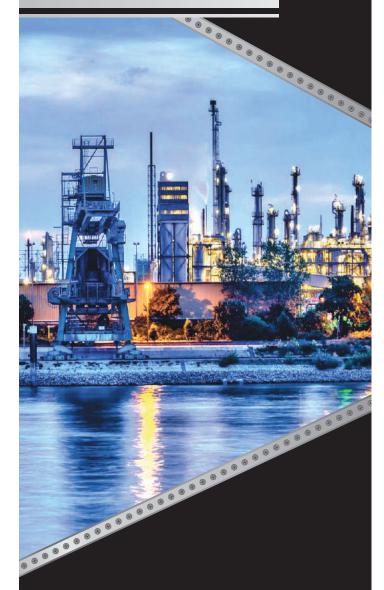

HYDRAULIC FLUIDS

COMPAQ XT ISO VG

32 / 46 / 68 / 100 / 150 / 220

APPLICATION

Compaq XT anti- ear hydraulic are recommended as fluid media for hydraulic systems under moderate condition in equipments where high pressure vane pumps are used.and also recommended for circulation, spalsh, ring oiling ystem.

Size Available:

20L, 50L, 210L

HLP

32 / 46 / 68

APPLICATION

HLP Oils have good good filterability & formulated to use in hydraulic systems, high performance electro-hydraulic or numerically controlled systems, pumps & circulating ystem.

Size Available:

20L, 50L, 210L

WAY LUBE (Slide Way Oil)

68

APPLICATION

The product have extreme pressure, wear and film strength properties and meet the xact demand of slide way purpose in grinders, planners, milling machines and other equipment.

Size Available:

20L. 210L

METAL FLUIDS

SUPER CUT-S (SOLUBLE CUTTING OIL)

APPLICATION

TITANIC SUPER CUT-S is recommended for variety of cuttin operaratio on ferrous and non-ferrous metals. recommended dilution 1:20 in s ofwater foror bet result.

Size Available:

20L, 210L

RUST GUARD (RUST PREVENTIVE OIL)

274 / 901

APPLICATION

RUST GUARD Oils has dual applicationas it offers good rust protection during i terprocess treatment as well as at final packaging stage. to get uniform film applied by spray or cold deep.

Size Available:

20L, 210L

QUENCH OIL

APPLICATION

Quench Oil is suitable for quenching of finished products of high precision and high quality products. the finished products include automoti e gear, transmission parts, tool, dies, etc.

Size Available:

20L, 210L

GEAR FLUIDS

TECHNO GEAR

AGMA EP 220 / 320 / 460

APPLICATION

Extreme pressure gear oil formulated for use in industrial gear drives operating unde high load, shock load and other severe service conditions.

Size Available:

5L. 10L. 20L. 50L. 210L

TEXTILE FLUIDS

SPINDLE OIL

10/12

APPLICATION

Spindle oil has been specially developed for modern high speed spindles in machine tools & textilespinning machine also recommended for use in low viscosity hydraulic system Size Available:

20L, 210L

HEAT FLUIDS

THERMIC OIL

APPLICATION

Thermic oil is recommended in various type heat transfer systems for indirect heating in industrial applications

Size Available:

20L, 210L



EARTHMOVER OILS

COMPAQ AW ISO VG

32 / 46 / 68

APPLICATION

Compaq AW anti- ear hydraulic are recommended as fluid media for hydraulic systems under moderate condition in earthmover equipment like. Back Hoe Loader, dozer etc. where high pressure hydraulic pumps.

Size Available:

5L, 10L, 20L, 50L, 210L

COMPAQ 10W

APPLICATION

Compaq AW anti- ear hydraulic are recommended as fluid media for hydraulic systems under severe conditionin offroad equipment like. Back Hoe Loader, dozer, Excavator etc.

Size Available:

20L, 210L

DRIVE TRANS C4

SAE 10W / SAE 30

APPLICATION

Drive Trans C4 Oil are recommended for use in all types of commercial power shifttransmissions, & auto transmission for on-road & off-road equipments like, scrapers, excavator loaders, crawler tractor etc.

Size Available:

20L, 210L

